


Floor Lamp - Bollard & Pole | 220-240 V
1 topLED 9 W DC - 10 W AC | CRI 90
77100M00

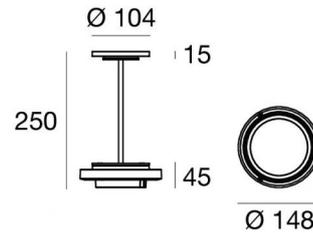

Technical data	
Type	Floor Lamp - Bollard &
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	9 W DC
Total Power	10 W
Source lumens	1316 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK07
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	0.580 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes

Finishing casing

Material	Aluminium
Colour	Dark brown
Processing	Coating

Finishing diffuser

Material	PMMA
Colour	Transparent

Finishing base

Material	PC
Colour	Black

Floor Lamp - Bollard & Pole | 220-240 V | 1 topLED 9 W DC - 10 W AC | CRI 90 | Base
77100M00

Single emission floor lamp or bollard & pole for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 40 topped LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1316 lm, with a 146.2 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a dark brown finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP65; the total weight is of 0.580 kg.

The total absorbed power is 10 W

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class


This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	22 %
Source lumens	1316 lm
Delivered lumens	300 lm
Consumption	10 W
Luminaire efficacy	30 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
UV-C Power	1,0 W
Standard Operating Ambient Temperature	-20 / +50°C


LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)

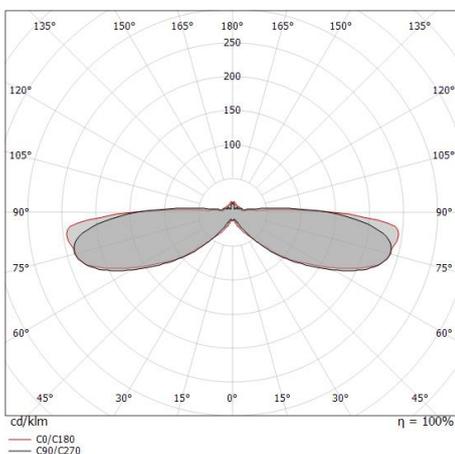

Floor Lamp - Bollard & Pole | 220-240 V | 1 topLED 9 W DC - 10 W AC | CRI 90
77100M00


Components



Rolling Sky | Sphere - Paletti e teste palo

Code

C-D100001




Rolling Sky | Amphora - Paletti e teste palo

Code

C-D100004

Rolling Sky | Bollard & Pole | Accessories
77100M00



Picket

installation position: land,Cover material: uv resistant polycarbonate

Code

14931