



Floor Lamp - Bollard & Pole | 198-264 V  
 1 topLED 15 W DC - 17 W AC | CRI 90  
**77102M00**

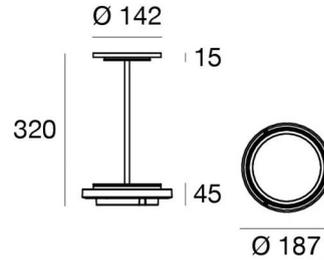

**Light Module**

**Diffuser**

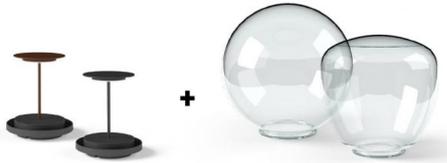

Technical data	
Type	Floor Lamp - Bollard &
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	15 W DC
Total Power	17 W
Source lumens	1987 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK07
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	.980 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes

**Finishing casing**

Material	Aluminium
Colour	Dark brown
Processing	Coating

**Finishing diffuser**

Material	PMMA
Colour	Transparent

**Finishing base**

Material	PC
Colour	Black

Floor Lamp - Bollard & Pole | 198-264 V | 1 topLED 15 W DC - 17 W AC | CRI 90 | Base  
**77102M00**

Single emission floor lamp or bollard & pole for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 63 topped LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1987 lm, with a 132.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a dark brown finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP65; the total weight is of.980 kg.

The total absorbed power is 17 W

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class


This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	23 %
Source lumens	1987 lm
Delivered lumens	470 lm
Consumption	17 W
Luminaire efficacy	27 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	-20 / +50°C


### LED Life / Failure Ratio

L70 B20 C0 72500h

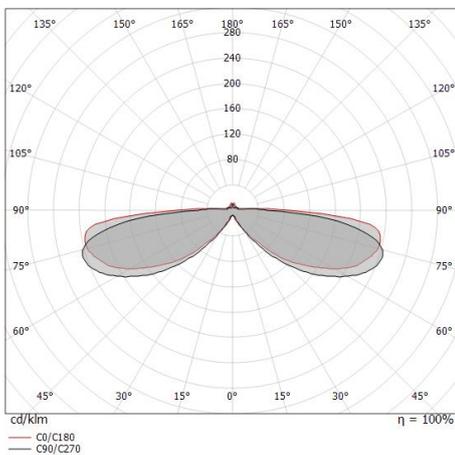

Floor Lamp - Bollard & Pole | 198-264 V | 1 topLED 15 W DC - 17 W AC | CRI 90  
**77102M00**


### Components



Rolling Sky | Sphere - Paletti e teste palo

**Code**

C-D100002




Rolling Sky | Amphora - Paletti e teste palo

**Code**

C-D100005

Rolling Sky | Bollard & Pole | Accessories  
**77102M00**



Picket

installation position: land,Cover material: uv resistant polycarbonate

**Code**

14931