


Pendant Luminaires | 198-264 V
12 topLED 48 W DC - 54 W AC | CRI 90
8844

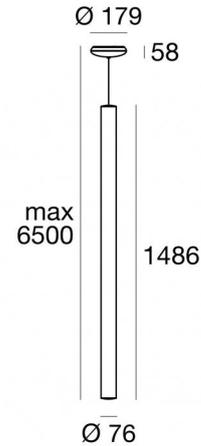

Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	48 W DC
Total Power	54 W
Source lumens	7242 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Resin potting	No
Type of light emission	Double emission
Net weight	2.91 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes

Finishing Finishing casing

Material	Aluminium
Colour	Text white (R9003)
Processing	Coating

Finishing Finishing diffuser

Material	PMMA
Colour	opaline

Finishing Finishing mounting frame

Material	Iron
Colour	Text white (R9003)
Processing	Coating

Cables Electrification+ suspension

Max cable length	5000 mm
------------------	---------

Pendant Luminaires | 198-264 V | 12 topLED 48 W DC - 54 W AC | CRI 90 | Base
8844

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 384 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 7242 lm, with a 150.9 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white (r9003) finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of iron, with a text white (r9003) finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 2.91 kg.

The total absorbed power is 54 W The power supply cable is included and features a 5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 12 light sources of energy efficiency class D.

Illuminotechnical Features

Light Output Ratio (LOR)	82 %
Source lumens	7242 lm
Delivered lumens	5996 lm
Consumption	54 W
Luminaire efficacy	111 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)

UGR

UGR axial	20.8
UGR transversal	19.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	180°
C0/C180 optics	144°
Light distribution symmetry	Symmetrical 2 assis

