


Wall Lights | 200-264 V
2 arrayLED 16 W DC - 19 W AC | CRI 90
9663M

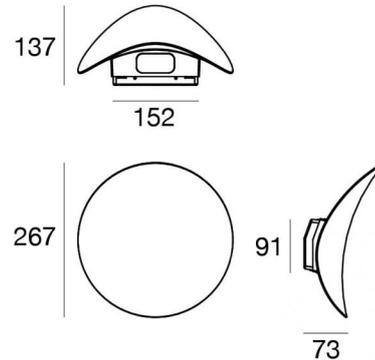

Technical data	
Type	Wall Lights
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	16 W DC
Total Power	19 W
Source lumens	1782 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	200 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	1.100 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes

Finishing casing	
Material	Aluminium
Colour	Grey RAL 9006
Processing	Coating

Finishing diffuser	
Material	Glass - Tempered
Colour	transparent

Finishing mounting frame	
Material	Aluminium
Colour	Grey RAL 9006
Processing	Coating

Wall Lights | 200-264 V | 2 arrayLED 16 W DC - 19 W AC | CRI 90 | Base
9663M

Double emission wall lights for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 2 topped LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1782 lm, with a 111.4 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a grey ral 9006 finish, processed by means of coating; the diffuser is made of glass - tempered; the mounting frame is made of aluminium, with a grey ral 9006 finish, processed by means of coating.

The ingress protection degree is IP65; the total weight is of 1.100 kg.

The total absorbed power is 19 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 2 light sources of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	72 %
Source lumens	1782 lm
Delivered lumens	1284 lm
Consumption	19 W
Luminaire efficacy	67 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio

L80 B20 C0 80000h

