

Wall Lights | 198-264 V | 72 topLED 25 W DC - 28 W AC | CRI 80 | Base
9672M

Double emission wall lights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 72 topLEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 2272 lm, with a 90.9 lm/W nominal luminous efficacy.

; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of aluminium, with a text white (r9003) finish, processed by means of coating.

The ingress protection degree is IP40; the total weight is of 2.000 kg.

The total absorbed power is 28 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 2 light sources of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	67 %
Source lumens	2272 lm
Delivered lumens	1540 lm
Consumption	28 W
Luminaire efficacy	55 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio


L70 B20 C0 72500h

UGR


UGR axial	35.6
UGR transversal	21.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	180°
Light distribution simmetry	Symmetrical

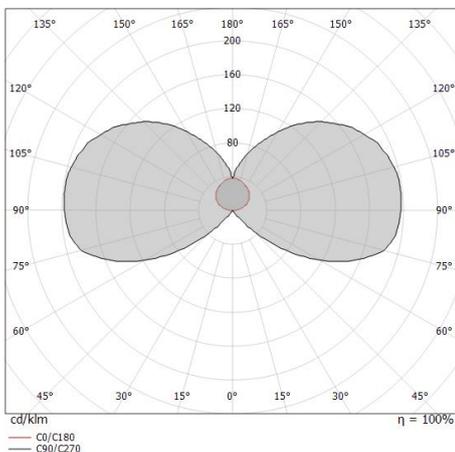


Gemini_W1 | Wall Lights | Accessories
9672M



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp
220-240V

Code
KIT0026



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi
Radio-frequenza, 85-240V

Code
KIT0080