


Wall Lights | 198-264 V | 72 topLED 18 W DC - 19 W AC | CRI 90  
**9676M**

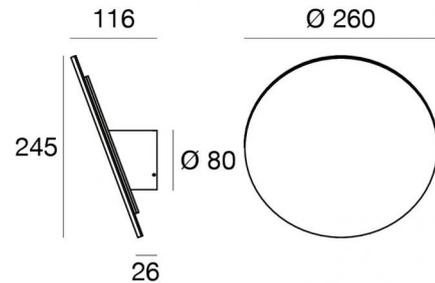

Technical data	
Type	Surface
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	18 W DC
Total Power	19 W
Source lumens	2006 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	2.100 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV

Finishing Finishing diffuser	
Material	PMMA
Colour	Transparent
Processing	Satin finishing

Finishing Finishing mounting frame	
Material	Aluminium
Colour	Text white (R9003)
Processing	Coating

Wall Lights | 198-264 V | 72 topLED 18 W DC - 19 W AC | CRI 90 | Base  
**9676M**

Single emission wall lights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 72 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2006 lm, with a 111.4 lm/W nominal luminous efficacy.

; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of aluminium, with a text white (r9003) finish, processed by means of coating.

The ingress protection degree is IP40; the total weight is of 2.100 kg.

The total absorbed power is 19 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

#### Energy efficiency class

This product contains 3 light sources of energy efficiency class D.

#### Illuminotechnical Features

Light Output Ratio (LOR)	97 %
Source lumens	2006 lm
Delivered lumens	1949 lm
Consumption	19 W
Luminaire efficacy	102 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

#### LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25 )

