


Floor Lamp | 220-240 V  
144 topLED 32 W DC - 35 W AC | CRI 90  
**9817**

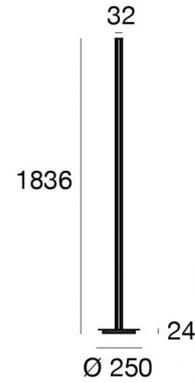

Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	32 W DC
Total Power	35 W
Source lumens	3590 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	3.5 m
Resin potting	No
Type of light emission	Single emission
Net weight	5.200 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes

Finishing Finishing casing	
Material	Aluminium
Colour	translucent

Finishing Finishing diffuser	
Material	PC
Colour	opaline

Finishing Finishing mounting frame	
Material	Iron
Colour	Text white (R9003)
Processing	Coating

Floor Lamp | 220-240 V | 144 topLED 32 W DC - 35 W AC | CRI 90 | Base  
**9817**

Single emission floor lamp for indoor application. The warm white LED light source with a diffused light distribution is composed of 144 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3590 lm, with a 112.2 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a translucent finish; the diffuser is made of PC; the mounting frame is made of iron, with a text white (r9003) finish, processed by means of coating.

The ingress protection degree is IP40; the total weight is of 5.200 kg.

The total absorbed power is 35 W The power supply cable is included and features a 3.5 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	49 %
Source lumens	3590 lm
Delivered lumens	1773 lm
Consumption	35 W
Luminaire efficacy	50 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

### LED Life / Failure Ratio

L70 B20 C0 72500h

### OPTICAL

C0/C180 optics	24°
Light distribution symmetry	Asymmetrical

