



Ceiling Downlights | 198-264 V | 36 topLED 13 W DC - 15 W AC | CRI 90
CA083DBBMDI



Technical data	
Type	Ceiling Downlights
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	13 W DC
Total Power	15 W
Source lumens	1563 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Electrostatic discharge protection	Yes
Surge protection	Yes

Finishing Finishing casing

Material	Aluminium
Colour	Text black (R9005)
Processing	Coating

Finishing Finishing diffuser

Material	PMMA
Colour	opaline

Finishing Finishing mounting frame

Material	Iron
Colour	Text black (R9005)
Processing	Coating

Ceiling Downlights | 198-264 V | 36 topLED 13 W DC - 15 W AC | CRI 90 | Base CA083DBBMDI

Double emission ceiling downlights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 36 topLED LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1563 lm, with a 120.2 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text black (r9005) finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of iron, with a text black (r9005) finish, processed by means of coating.


The ingress protection degree is IP20;

The total absorbed power is 15 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	91 %
Source lumens	1563 lm
Delivered lumens	1432 lm
Consumption	15 W
Luminaire efficacy	95 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Standard Operating Ambient Temperature	-20 / +50°C
LED Life / Failure Ratio	
L70 B20 C0 72500h (at Tj 115 Ta 25)	
UGR	
UGR transversal	23.8
UGR axial	23.8
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
C0/C180 optics	175°
Light distribution simmetry	Symmetrical

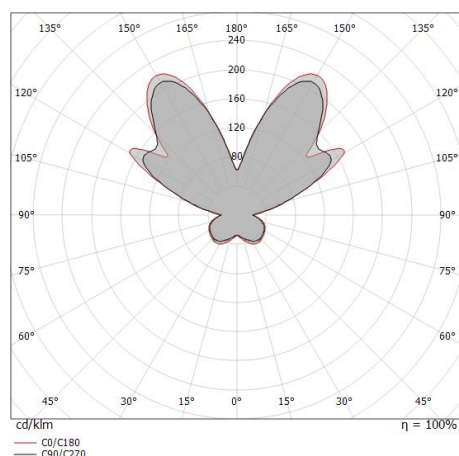

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	63.66 22.02	E(0°) E(C90) E(C0) 89.1° 87.4° 159 0 0
1.0	127.31 44.04	E(0°) E(C90) E(C0) 89.1° 87.4° 40 0 0
1.5	190.97 66.07	E(0°) E(C90) E(C0) 89.1° 87.4° 18 0 0
2.0	254.63 88.09	E(0°) E(C90) E(C0) 89.1° 87.4° 10 0 0
2.5	318.28 110.11	E(0°) E(C90) E(C0) 89.1° 87.4° 6 0 0
3.0	381.94 132.13	E(0°) E(C90) E(C0) 89.1° 87.4° 4 0 0

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 174.8°)
— C90/C270 (Half-peak divergence: 178.2°)

Stilo_S | Ceiling Downlights | Accessories
CA083DBBMDI



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp
220-240V

Code
KIT0026



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi
Radio-frequenza, 85-240V

Code
KIT0080