

Nox





Nox

Outdoor ceiling lamps equipped with SMD LEDs, driver with the possibility of power selection and changing the color temperature 2700K or 3000K.

Die-cast aluminum body with anti-rust and anti-corrosion protection treatment by cataphoresis, electrostatically painted in sand white, dark grey, corten or sand black, opal white polycarbonate diffuser. Also available in versions equipped with DALI driver.



Plafoniere pentru exterior echipate cu LED-uri SMD, driver cu posibilitatea selecționării puterii și de schimbare a temperaturii de culoare 2700K sau 3000K.

Corp din aluminiu turnat sub presiune, cu tratament de protecție antirugină și anticorozivă prin cataforeză, vopsită în câmp electrostatic alb mat, gri închis, corten sau negru mat, dispersor din policarbonat alb opal. Versiuni dotate cu driver DALI.

Plafoniere da esterno dotate di LED SMD, driver con possibilità di selezionare la potenza e di cambiare la temperatura colore 2700K o 3000K.

Corpo in alluminio pressofuso con trattamento protettivo antiruggine e anticorrosione mediante cataforesi, verniciato a polveri bianco opaco, grigio scuro, corten o nero opaco, diffusore in policarbonato bianco opalino.

Versioni dotate con driver DALI.

Наружные потолочные светильники с SMD-светодиодами и драйвером с возможностью выбора мощности и изменения цветовой температуры 2700K или 3000K.

Корпус из литого под давлением алюминия с антикоррозийной и антиржавчинной защитой, обработанный методом катафореза и электростатически окрашенный в песочно-белый, темно-серый, кортен или песочно-черный цвет. Оснащены рассеивателем из опалового белого поликарбоната.

Также доступны версии с драйвером DALI.

Kültéri mennyezeti lámpák SMD LED-ekkel, meghajtóval, amely lehetővé teszi a teljesítmény kiválasztását és a színhőmérséklet 2700K vagy 3000K közötti állítását.

Nyomás alatt öntött alumínium házzal, amely katóforézissel kezelt, rozsdamentes és korrózióvédelemmel, elektrosztatikusan festve homokfehér, sötétszürke, corten vagy homokfekete színben.

Opálfehér polikarbonát diffúzorral.


Elérhető DALI meghajtós változatban is.

Външни таванни лампи със SMD светодиоди, драйвер с възможност за избор на мощност и промяна на цветната температура между 2700K и 3000K. Корпус от лят под налягане алуминий с антикорозионна и антиръждаваща защита чрез катафореза, електростатично боядисан в пясъчно бяло, тъмносиво, кортен или пясъчно черно. С разсейвател от опалов бял поликарбонат. Предлагат се и версии с DALI драйвер.

Vonkajšie stropné svietidlá so SMD LED diódami, s ovládačom umožňujúcim výber výkonu a zmenu farebnej teploty medzi 2700K a 3000K.

Telo z hliníka odliateho pod tlakom s ochranou proti korózii a hrdzi pomocou kataforézy, elektrostáticky lakované v odtieňoch pieskovo biela, tmavosivá, corten alebo pieskovo čierna. So difúzorom z opálového bieleho polykarbonátu. K dispozícii sú aj verzie s DALI ovládačom.






MULTI POWER MODELS

Code	Finishing	Control
91041	 Sand White	On/Off
91042	 Dark Grey	
91043	 Corten	
91044	 Sand Black	
LED type	SMD LED 2835, 130 pcs	
Input voltage	220-240V, 50/60Hz	
Power	21W	
Lumen source/system	2700K: 2851 lm/1798 lm 3000K: 3002 lm/1890 lm	
CCT	2700K-3000K	
Optic	114°	
CRI	≥80	

DALI MODELS

Code	Finishing	Control
91041-DALI	 Sand White	Dali-2
91042-DALI	 Dark Grey	
91043-DALI	 Corten	
91044-DALI	 Sand Black	
LED type	SMD LED 2835, 130pcs	
Input voltage	220-240V, 50/60Hz	
Power	21W	
Lumen source/system	2700K: 2851lm/1798 lm 3000K: 3002 lm/1890 lm	
CCT	2700K-3000K	
Optic	114°	
CRI	≥80	




MULTI POWER MODELS

Code	Finishing	Control
91045	 Sand White	On/Off
91046	 Dark Grey	
91047	 Corten	
91048	 Sand Black	
LED type	SMD LED 2835, 221 pcs	
Input voltage	220-240V, 50/60Hz	
Power	29.5W	
Lumen source/system	2700K: 3993 lm/ 2663 lm 3000K: 4202 lm/2803 lm	
CCT	2700K-3000K	
Optic	114°	
CRI	≥80	

DALI MODELS

Code	Finishing	Control
91045-DALI	 Sand White	Dali-2
91046-DALI	 Dark Grey	
91047-DALI	 Corten	
91048-DALI	 Sand Black	
LED type	SMD LED 2835, 221pcs	
Input voltage	220-240V, 50/60Hz	
Power	29,5W	
Lumen source/system	2700K: 3993 lm/2663 lm 3000K: 4202 lm/2803 lm	
CCT	2700K-3000K	
Optic	114°	
CRI	≥80	





MULTI POWER MODELS

Code	Finishing	Control
91049	 Sand White	On/Off
91050	 Dark Grey	
91051	 Corten	
91052	 Sand Black	
LED type	SMD LED 2835, 143 pcs	
Input voltage	220-240V, 50/60Hz	
Power	21W	
Lumen source/system	2700K: 2851 lm/1798 lm 3000K: 3002 lm/1890 lm	
CCT	2700K-3000K	
Optic	114°	
CRI	≥80	

DALI MODELS

Code	Finishing	Control
91049-DALI	 Sand White	Dali-2
91050-DALI	 Dark Grey	
91051-DALI	 Corten	
91052-DALI	 Sand Black	
LED type	SMD LED 2835, 143 pcs	
Input voltage	220-240V, 50/60Hz	
Power	21W	
Lumen source/system	2700K: 2851 lm/1798 lm 3000K: 3002 lm/1890 lm	
CCT	2700K-3000K	
Optic	114°	
CRI	≥80	

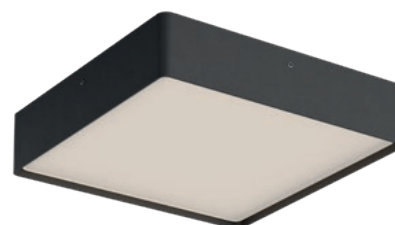

MULTI POWER MODELS

Code	Finishing	Control
91053	 Sand White	On/Off
91054	 Dark Grey	
91055	 Corten	
91056	 Sand Black	
LED type	SMD LED 2835, 234 pcs	
Input voltage	220-240V, 50/60Hz	
Power	29.5W	
Lumen source/system	2700K: 3993 lm/2663 lm 3000K: 4202 lm/2803 lm	
CCT	2700K-3000K	
Optic	114°	
CRI	>80	

DALI MODELS

Code	Finishing	Control
91053-DALI	 Sand White	Dali-2
91054-DALI	 Dark Grey	
91055-DALI	 Corten	
91056-DALI	 Sand Black	
LED type	SMD LED 2835, 234 pcs	
Input voltage	220-240V, 50/60Hz	
Power	29.5W	
Lumen source/system	2700K: 3993 lm/2663lm 3000K: 4202 lm/2803 lm	
CCT	2700K-3000K	
Optic	114°	
CRI	>80	