

Cliff





Cliff

Outdoor bollard/spikes equipped with SMD LED or COB LED.

Concrete structure finished in ivory, dark grey or terracota, marine grade aluminum 5083 radiator, AISI 316 stainless steel components and screws painted matte black, satin glass diffuser. Supplied with plastic spike.



Stâlpișori/picheți pentru exterior dotați cu LED SMD sau COB.

Structură din beton culoare ivoar, gri închis sau cu finisaj teracotă, radiator din aluminiu rezistent la sare 5083, componente și șuruburi din inox AISI 316 vopsit negru mat, dispersor din sticlă satinată. Se livrează cu pichet din plastic.

Paletti/picchetti da esterno dotati di LED SMD or LED COB.

Struttura in cemento avorio, grigio scuro o con finitura terracota, radiatore in alluminio 5083 per uso marino, componenti e viti in acciaio inox AISI 316 verniciati nero opaco, diffusore in vetro satinato. Forniti con picchetto in plastica.

Столбики/пики для наружного освещения, оснащенные светодиодом SMD.

Бетонный корпус цвета слоновой кости, темно-серого цвета или с отделкой под терракоту, радиатор из солестойкого алюминия 5083, компоненты и винты из нержавеющей стали AISI 316, окрашенные в матовый черный цвет, рассеиватель из сатинированного стекла.

Поставляется с пластиковой пикой.

Kültéri, SMD LED-es oszlop/kisoszlop.

Elefántcsont, sötétszürke vagy terrakotta színű beton szerkezet, sóálló 5083 alumínium radiátor, matt fekete színre festett AISI 316 rozsdamentes acél alkatrészek és csavarok, szatén üveg disperzór. Műanyag rögzítőoszloppal szállítva.

Стьлбче/колче за външно осветление, оборудвано с LED SMD.

Конструкция от бетон цвят слонова кост, тъмно сив или с теракотова облицовка, радиатор от алуминий, устойчив на сол 5083, компоненти и винтове от нерждаема стомана AISI 316, боядисан в матово черно, разсейвател от сатенено стъкло. Доставка се с пластмасово колче.

Exteriérové stĺpiky vybavené SMD LED diódami.


Betónová konštrukcia v slonovinovej, tmavosivej alebo terakotovej farbe, hliníková časť 5083 odolná voči soli, komponenty a skrutky z matne čiernej nehrdzavejúcej ocele AISI 316, difúzor zo saténovo bieleho skla. Dodáva sa s plastovou tyčkou.




360° LIGHT EMISSION

24V DC MODELS


TRIAC CASAMBI by TRIDONIC **DALI** **tuya**

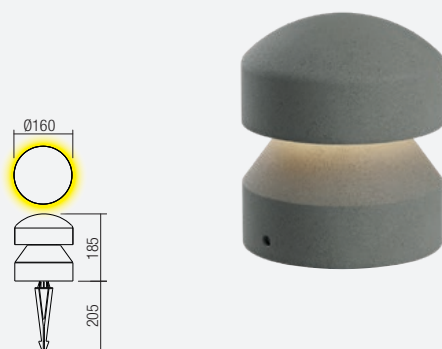


Code	Finishing	CCT	Control
91103	 Ivory	2700K	Triac/Casambi/Dali/Tuya (Remote)
91104	 Dark Grey	2700K	
91105	 Terracotta	2700K	
90982	 Ivory	3000K	
90983	 Dark Grey	3000K	
90984	 Terracotta	3000K	
LED type	SMD LED LUMILEDS, 21 pcs		
Input voltage	24VDC		
Power	9W		
Lumen source/system	2700K: 853 lm/ 330 lm		
	3000K: 912 lm/ 347 lm		
Optic	360°		
CRI	≥90		

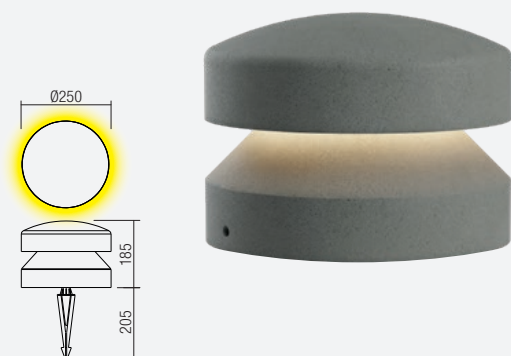


Code	Finishing	CCT	Control
91119	 Ivory	2700K	Triac/Casambi/Dali/Tuya (Remote)
91120	 Dark Grey	2700K	
91121	 Terracotta	2700K	
90990	Ivory	3000K	
90991	 Dark Grey	3000K	
90992	 Terracotta	3000K	
LED type	SMD LED LUMILEDS 35 pcs		
Input voltage	24V DC		
Power	15W		
Lumen source/system	2700K: 1324 lm/ 512 lm 3000K: 1444 lm/ 539 lm		
Optic	360°		
CRI	≥90		




220-240V AC MODELS

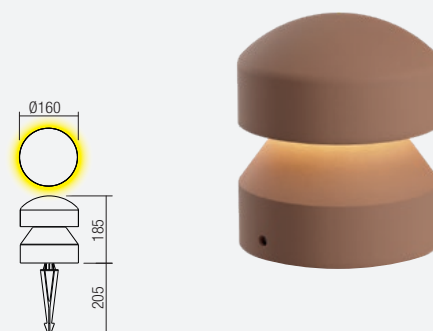

Code	Finishing	CCT	Control
90985	 Ivory	2700K	On/Off
91106	 Dark Grey	2700K	
91107	 Terracotta	2700K	
91108	 Ivory	3000K	
91109	 Dark Grey	3000K	
91110	 Terracotta	3000K	
LED type	SMD LED LUMILEDS, 24 pcs		
Input voltage	220-240V, 50/60Hz		
Power	8W		
Lumen source/system	2700K: 876 lm/ 325 lm 3000K: 917 lm/ 351 lm		
Optic	360°		
CRI	>90		

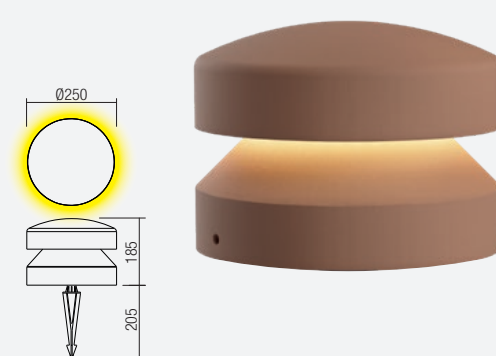

Code	Finishing	CCT	Control
90993	 Ivory	2700K	On/Off
91122	 Dark Grey	2700K	
91123	 Terracotta	2700K	
91124	 Ivory	3000K	
91125	 Dark Grey	3000K	
91126	 Terracotta	3000K	
LED type		SMD LED LUMILEDS 35 pcs	
Input voltage		220-240V, 50/60Hz	
Power		15W	
Lumen source/system		2700K: 1519 lm/ 542 lm 3000K: 1630 lm/ 606 lm	
Optic		360°	
CRI		≥90	



Recommended Drivers at page 619

Cliff









180° LIGHT EMISSION

24V DC MODELS


TRIAC CASAMBI by TRIDONIC **DALI** **tuya**

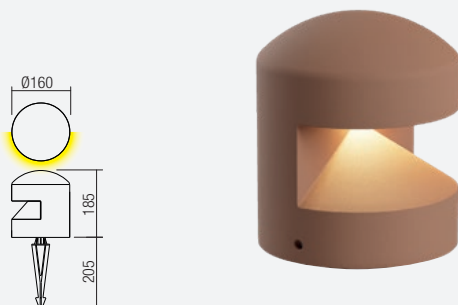


Code	Finishing	CCT	Control
91095	 Ivory	2700K	Triac/Casambi/Dali/Tuya (Remote)
91096	 Dark Grey	2700K	
91097	 Terracotta	2700K	
90978	 Ivory	3000K	
90979	 Dark Grey	3000K	
90980	 Terracotta	3000K	
LED type SMD LED BRIDGELUX, 9 pcs			
Input voltage		24V DC	
Power		8W	
Lumen source/system		2700K: 671 lm/148 lm	
		3000K: 701 lm/156 lm	
Optic		180°	
CRI		>90	

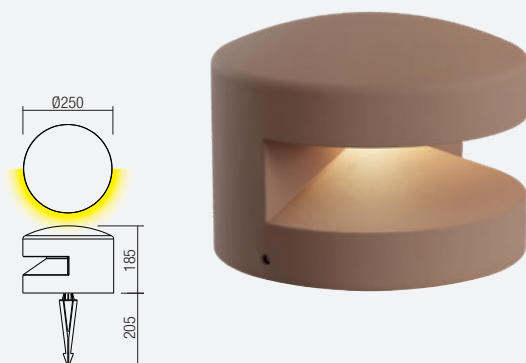


Code	Finishing	CCT	Control
91111	 Ivory	2700K	Triac/Casambi/Dali/Tuya (Remote)
91112	 Dark Grey	2700K	
91113	 Terracotta	2700K	
90986	 Ivory	3000K	
90987	 Dark Grey	3000K	
90988	 Terracotta	3000K	
LED type	SMD LED BRIDGELUX, 20 pcs		
Input voltage	24V DC		
Power	15 W		
Lumen source/system	2700K: 1720 lm/ 396 lm		
	3000K: 1748 lm/ 405 lm		
Optic	180°		
CRI	≥90		




220-240V AC MODELS

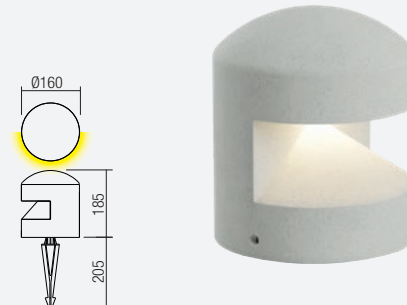

Code	Finishing	CCT	Control
90981	 Ivory	2700K	On/Off
91098	 Dark Grey	2700K	
91099	 Terracotta	2700K	
91100	 Ivory	3000K	
91101	 Dark Grey	3000K	
91102	 Terracotta	3000K	
LED type	COB LED CREE 1 pc		
Input voltage	220-240V, 50/60Hz		
Power	8W		
Lumen source/system	2700K: 680 lm/ 152 lm		
	3000K: 715 lm/ 159 lm		
Optic	180°		
CRI	>90		

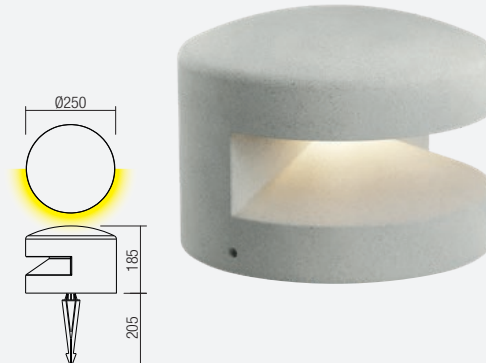

Code	Finishing	CCT	Control
90989	 Ivory	2700K	On/Off
91114	 Dark Grey	2700K	
91115	 Terracotta	2700K	
91116	Ivory	3000K	
91117	 Dark Grey	3000K	
91118	 Terracotta	3000K	
LED type		COB LED CREE 1pc	
Input voltage		220-240V, 50/60Hz	
Power		15W	
Lumen source/system		2700K: 1322 lm/ 308 lm	
		3000K: 1406 lm/ 323 lm	
Optic		180°	
CRI		≥90	



Recommended Drivers at page 619